

Step 1: You will need to remove the screw near the D-ring in order to assemble the collar.




Step 2: Once you unscrew the snap, remove the post.



Step 3:

Next you will weave the strap through the receiver box on your collar.

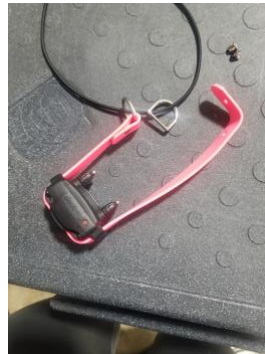

Step 4: You will now put the D-ring and posts back into place on the collar and refasten the screw.

Step 5: (Optional) If desired the Bungee cording can be cut down a bit. If you do this, use a lighter to heat seal (lightly burn) the outer nylon on the cording to prevent fraying. Make sure to tie an end knot to prevent the cord from slipping through the keeper when loosening.

Now you should be ready to work your dog.